

Ladder				
Type	Rungs	R	E	H
OL207	2 x 7	1910 mm	2910 mm	2800 mm
OL208	2 x 8	2160 mm	3410 mm	3285 mm
OL209	2 x 9	2410 mm	3910 mm	3770 mm
OL210	2 x 10	2660 mm	4410 mm	4255 mm
OL211	2 x 11	2910 mm	4910 mm	4735 mm
OL212	2 x 12	3160 mm	5410 mm	5220 mm
OL214	2 x 14	3660 mm	6410 mm	6185 mm
OL308	3 x 8	2160 mm	4645 mm	4495 mm
OL310	3x 10	2660 mm	6145 mm	5945 mm
OL312	3 x 12	3160 mm	7645 mm	7395 mm

R = Length retracted  
 E = Length extended  
 H = Max. floor height



### Design and application

OL Multi-section, - Max. floor height 7395 mm.

Depending on the floor height, the Gorter push-up and extension ladders are available with a double or triple extension ladder. The Gorter ladder is supplied as standard with suspension brackets for safe storage when the ladder is not in use.

### Construction and safety

- » The extension ladder is made of anodised aluminium, with two fixed hooks at the top, one of which can be padlocked to prevent the ladder from being moved accidentally during use. The ladder is supplied with an anti-slip tread for installation in or under the ceiling.
- » The ladders are supplied with Aboma Safety Approval, TÜV NORD certificate and "Baumuster geprüft" label.
- » The ladder installation manual is included in the stair packaging and may also be downloaded from the Gorter website.

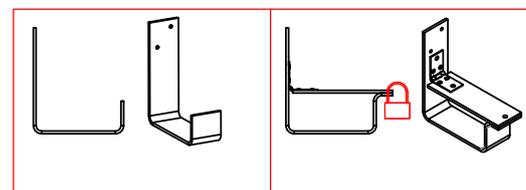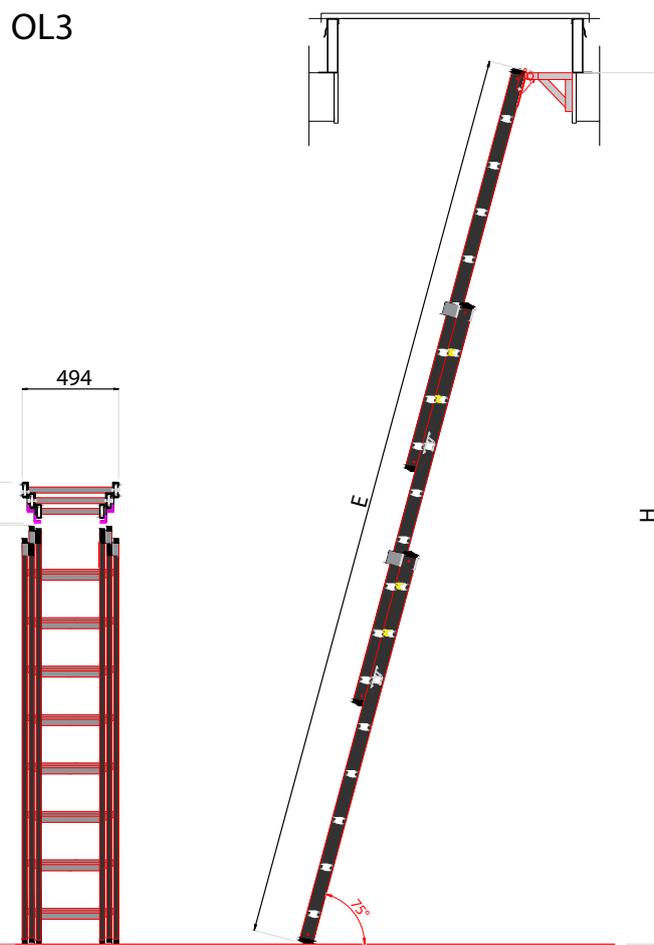

» Suspension bracket open

» Suspension bracket lockable excluding padlock